

12V Battery Charger Range Summary

The ODYSSEY[®] Battery charger range has been designed to optimise the performance and life of your ODYSSEY Battery to make sure you're ready for action every time!

With a rugged and compact design that delivers fast and efficient charging, it is the perfect partner to fully and safely charge your ODYSSEY Battery whether you are an auto professional, or if you're using it at home.

The chargers are fully automatic with 7, 17 and 30 Amp model options, IP67 classified (waterproof for outdoor use), non-sparking, polarity protected, short-circuit proof and are over 90% efficient!

Features & Benefits

- Fully automatic for optimal charging
- Suitable for all quality 12 Volt Lead-Acid, Absorbed Glass Matt (AGM) batteries
- Waterproof, shockproof, and ignition protected
- User-friendly LED interface for charge status indication
- CE Approved



Selecting an ODYSSEY® Battery Charger

The table below provides a guide to select the appropriate charger for the ODYSSEY® battery range.

ODYSSEY® BATTERY



ODYSSEY® Battery Type	ODYSSEY® Battery Nominal Capacity (20hr Rate - Ah)	Recommended ODYSSEY® Battery Charger		
		12V 7A	12V 17A	12V 30A
PC310	8	✓		
PC370	15	✓		
PC535	14	✓		
PC545	13	✓		
PC625	18	✓		
PC680	16	✓		
PC925	28	✓		
PC950	34	✓		
PC1100	45		✓	
PC1200	42		✓	
PC1220	70		✓	
PC1230	55		✓	
PC1350	95			✓
PC1400	65		✓	
PC1500	68		✓	
PC1700	68		✓	
PC1750	74		✓	
PC1800-FT	214			✓
PC2150	100			✓
629-DIN B-1300	170			✓
625-DIN C-1500	220			✓

Note: larger chargers can be used which may result in a shorter recharge time

General Specifications

ODYSSEY® Battery Charger	Charge Current (A)	Nominal Voltage (V)	Nominal Dimensions (mm)			Typical Weight (kg)	Battery Connections
			Length	Width	Height		
7A	7	12	155	80	42	1.1	Crocodile Clips
17A	17	12	192	98	44.5	1.7	Crocodile Clips
30A	30	12	192	98	44.5	1.7	Crocodile Clips

Outline Drawings

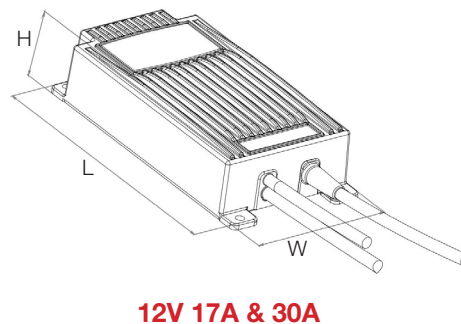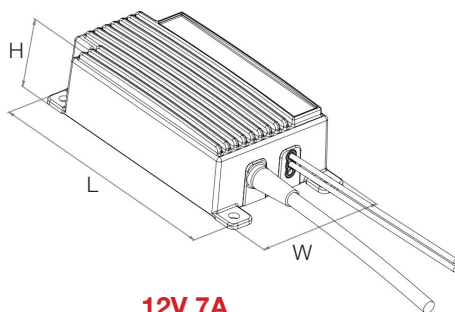

EnerSys
Power/Full Solutions

EnerSys World Headquarters
2366 Bernville Road, Reading, PA 19605, USA
Tel: +1-610-208-1991 / +1-800-538-3627

EnerSys EMEA
EH Europe GmbH, Baarerstrasse 18, 6300 Zug, Switzerland

EnerSys Asia
152 Beach Road, Gateway East Building #11-08, Singapore 189721
Tel: +65 6508 1780

Contact: